

ELMER SERIES LED PANEL

KEY FEATURES

BODY

White painted (RAL 9003) galvanized metal sheet

OPTIC


KV - double parabolic louvre category C2 or highly polished aluminium, with opal cover of LED modules

KVM - double parabolic louvre category C2 of mat aluminium, with opal cover of LED modules


LED

Mid power LED

CRI >80 (CRI >90 on request)

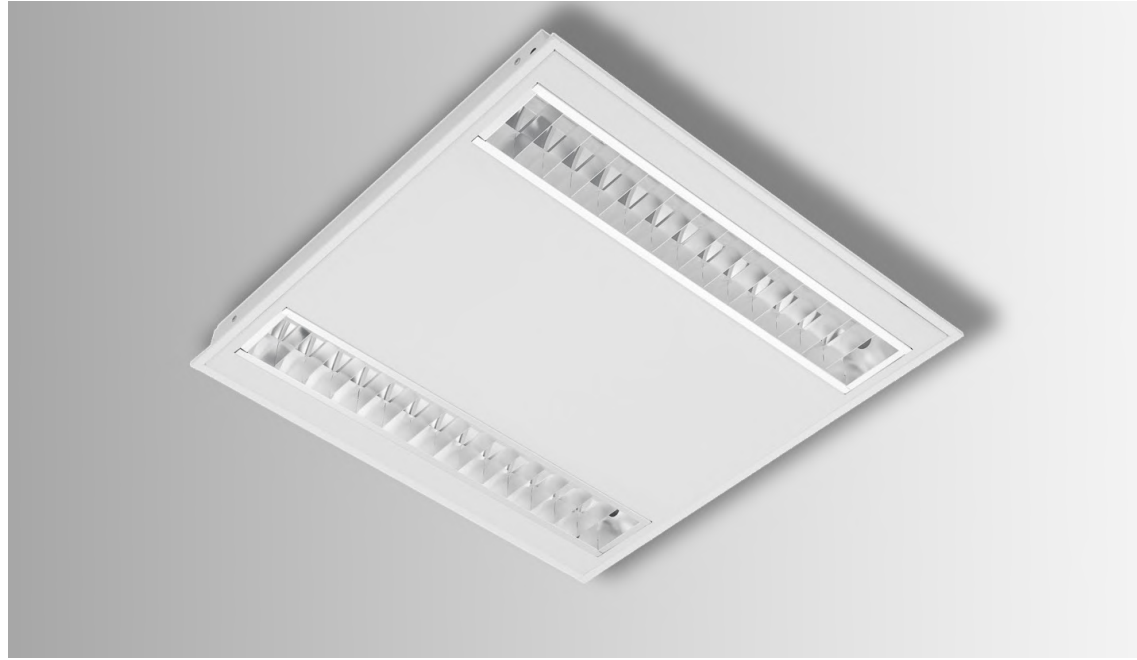

DIMENSIONS



MODEL	A(mm)	B(mm)	C(mm)
OL-ELMER-M1(L2)	600	600	52
OL-ELMER-M2(L2)	625	625	
OL-ELMER-M3(L4)	600	600	
OL-ELMER-M4(L4)	625	625	
OL-ELMER-M5(L2)	1,200	300	
OL-ELMER-M6(L2)	1,250	310	






TECHNICAL SPECIFICATION


MODEL NUMBER	W	lm KV / KVM	lm/W	K
OL-ELMER-M1(L2) -01	33	3,600lm/3,600lm	109	3,000K 4,000K 5,700K
OL-ELMER-M2(L2)-01	33	3,600lm/3,600lm	109	
OL-ELMER-M3(L4)-01	27	3,300lm/3,300lm	122	
OL-ELMER-M3(L4)-02	37	4,300lm/4,300lm	116	
OL-ELMER-M4(L4)-01	27	3,300lm/3,300lm	122	
OL-ELMER-M4(L4)-02	37	4,300lm/4,300lm	116	

Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.
contact@norse.lighting | www.norse.lighting

ELMER SERIES LED PANEL

MODEL NUMBER	W	 KV / KVM	 lm/W	 K
OL-ELMER-M5(L2)-01	27	3,300lm/3,300lm	122	3,000K 4,000K 5,700K
OL-ELMER-M5(L2)-02	37	4,300lm/4,300lm	116	
OL-ELMER-M6(L2)-01	27	3,300lm/3,300lm	122	
OL-ELMER-M6(L2)-01	37	4,300lm/4,300lm	116	


PHOTOMETRIC DRAWINGS



ACCESSORIES

NR-PF-R: A frame for recessed installation of Elmer panels into gypsum plasterboard ceiling (OPTIONAL)

ADDITIONAL PHOTOS



OL-ELMER-M1(L2)



OL-ELMER-M3(L4)



OL-ELMER-M5(L2)



LOUVRE DETAIL

Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.
contact@norse.lighting | www.norse.lighting

Please note: Specification values may change due to rapid development of lighting technology. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.