


LINEAR LIGHTS


JESSE SERIES SURFACE LINEAR LIGHT

KEY FEATURES

- Continuous direct, extruded linear profile system
- Features through wiring for simple electrical connection
- Mechanical joining kit with every product
- Start / End piece includes end cap
- Available in 4 building block lengths
- Suitable for surface mount or suspension fixing
- Low glare prismatic lens available for office and LG7 compliance
- Tridonic low energy LED and driver system
- TPa opal lens for general and visual areas as standard
- Finished in RAL 9006 grey as standard

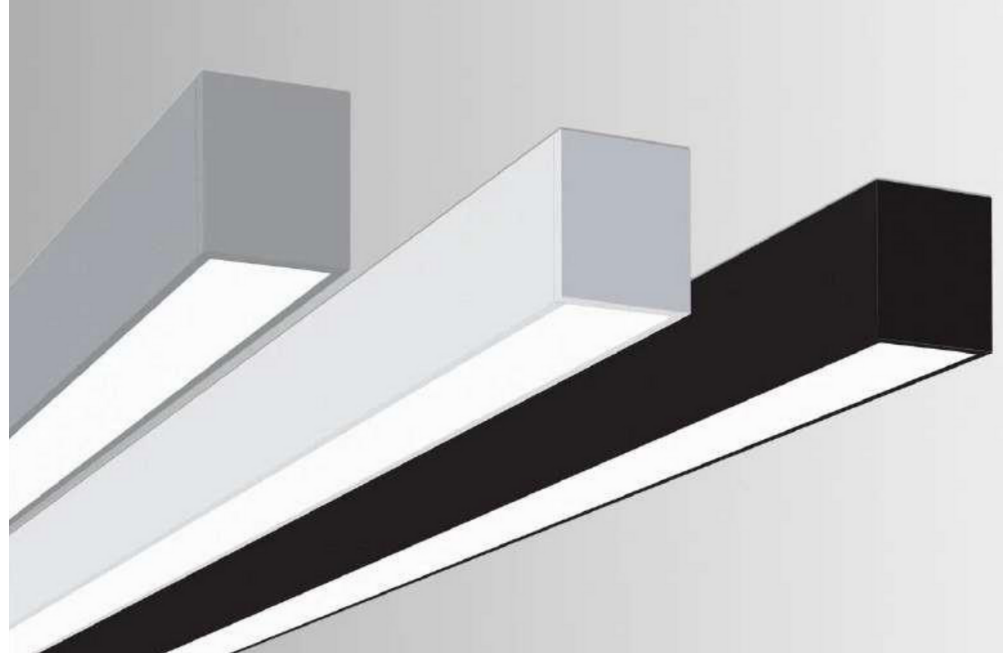

DIMENSIONS

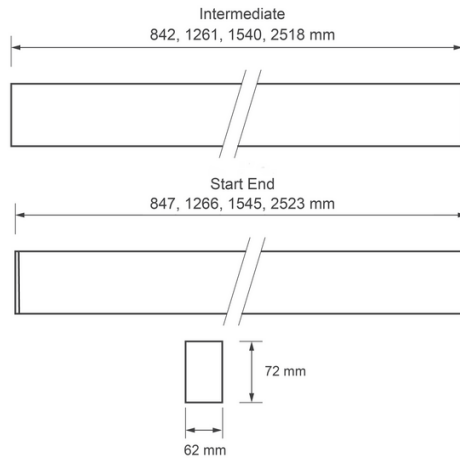

IP40
220-240V
OPT TEMP -25 to +35°C
50-60HZ
CRI 80
PF >0.9
LIFETIME 72,000 HRS
3/5yrs warranty
↑
⊗
CE
RoHS

TRIDONIC
 TECHNOLOGY
 INSIDE

TECHNICAL SPECIFICATION

MODEL NUMBER	W	lm	K
NR-JESSE-SM-M1	21W	1850lm	3,000K 4,000K
NR-JESSE-SM-M2	30W	2750lm	
NR-JESSE-SM-M3	35W	3375lm	
NR-JESSE-SM-M4	60W	5525lm	

M1: 850MM | M2: 1.2M | M3: 1.5M | M4: 2.5M

Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.
 contact@norse.lighting | www.norse.lighting

Please note: Specification values may change due to rapid development of lighting technology. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.

LINEAR LIGHTS

JESSE SERIES
SURFACE LINEAR LIGHT

OPTIONS


SE / Start / end section
with end cap




WH / White body




BK / Black body




LO / Lower output

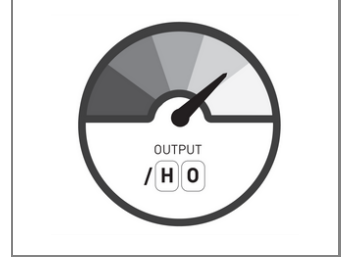

HO / Higher output




ECO / SwitchDIM,
Dali or DSI



EMI / EM conversion



LG / Low glare
prismatic lens



(not NR-JESSE-SM-M1)