

# LED PANEL

## BARRY SERIES

### KEY FEATURES

#### BODY


White painted (RAL9016) metalsheet

#### OPTIC


Microprismatic PS cover

#### LED

Mid power LED  
CRI 80 (CRI90 on request)

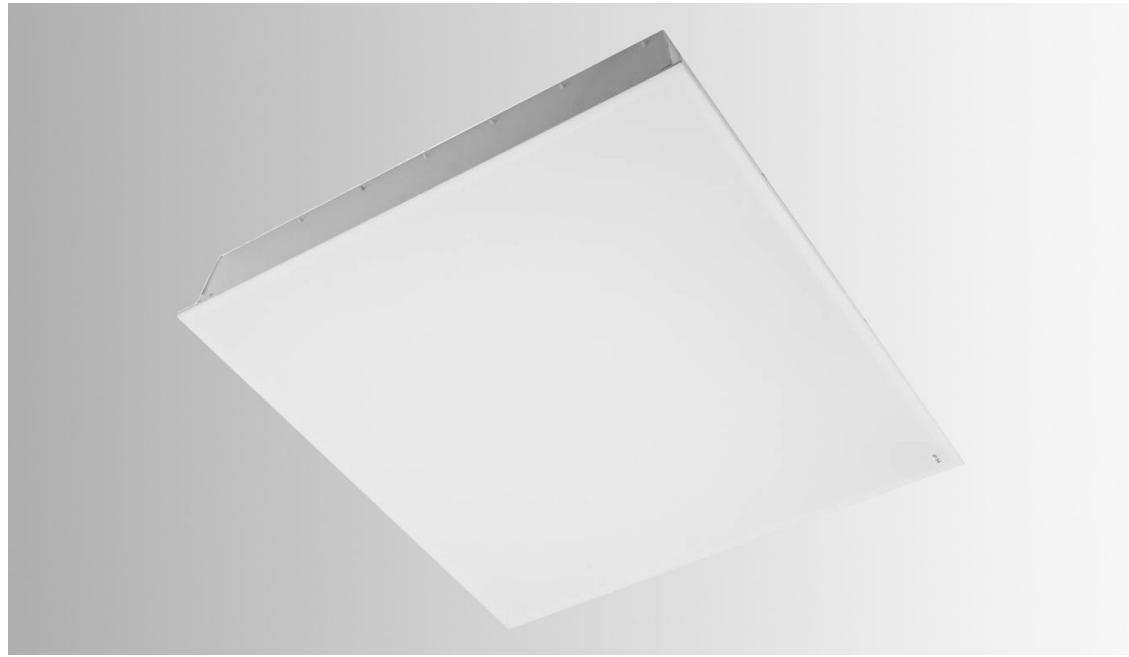

### DIMENSIONS

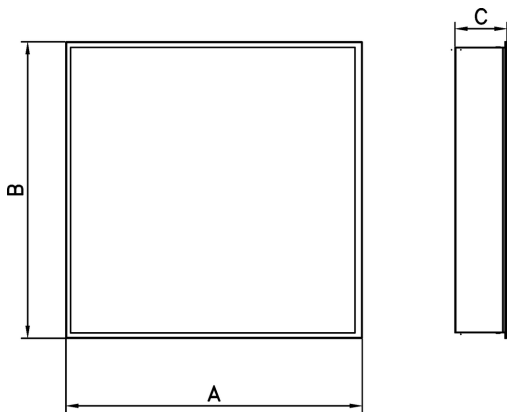

MODEL NUMBER	A (mm)	B(mm)	C(mm)
OL-BARRY-M1	596	596	90
OL-BARRY-M2	1,196	296	

IP54
220-240V
50-60HZ
CRI 80+
EEC A+
LIFETIME 80,000 HRS
↓
♻️
CE RoHS
BALL
DIM 1-10V DC

Standard Warranty: 2 Years  
Extended Warranty: 3 Years

### TECHNICAL SPECIFICATION

MODEL NUMBER	W	lm	lm/W	K
OL-BARRY-M1-01	23	3,200lm	139	3,000K 4,000K 5,700K
OL-BARRY-M1-02	32	4,200lm	131	
OL-BARRY-M1-03	55	6,900lm	126	
OL-BARRY-M2-01	23	3,000lm	130	
OL-BARRY-M2-02	32	4,000lm	125	
OL-BARRY-M2-03	57	6,900lm	121	


Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.  
contact@norse.lighting | www.norse.lighting

Please note: Specification values may change due to rapid development of lighting technology. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.

# LED PANEL

# BARRY SERIES

## PHOTOMETRIC DRAWINGS

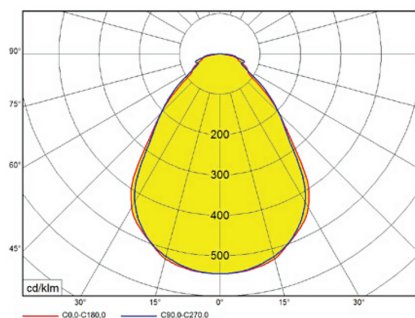

## ACCESSORIES

NR-PF-R: A frame for recessed installation into gypsum plasterboard ceiling.

## ADDITIONAL PHOTOS

OL-BARRY-M1



OL-BARRY-M2



COVER IP54



CLOSED TERMINAL

