

DOWN LIGHTS

BROOKE SERIES

KEY FEATURES

BODY


White painted aluminium body

OPTIC

Highly polished aluminium reflector
Opal glass cover



DIMENSIONS

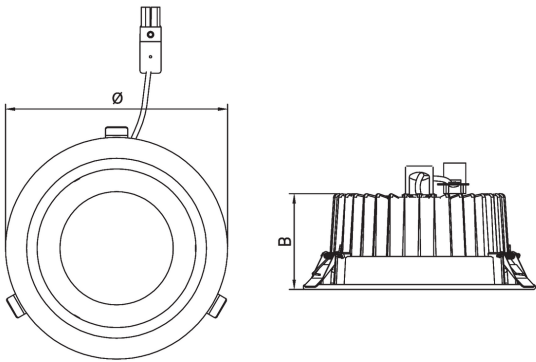

MODEL NUMBER	Ø (mm)	B(mm)
OL-BROOKE-M1	130	64
OL-BROOKE-M2	190	78
OL-BROOKE-M3	240	87

IP43

220-240V

OPT TEMP
-20 to +40°C

50-60HZ

CRI 80+

EEC A+

LIFETIME 80,000 HRS

CE

RoHS

Standard Warranty: 2 Years
Extended Warranty: 3 Years

TECHNICAL SPECIFICATION

MODEL NUMBER	W	lm	lm/W	K
OL-BROOKE-M1-01	8	750lm	94	3,000K 4,000K
OL-BROOKE-M2-01	10	1,000lm	100	
OL-BROOKE-M3-01	15	1,500lm	100	
OL-BROOKE-M3-02	20	2,100lm	105	
OL-BROOKE-M3-03	28	3,000lm	107	


Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.
contact@norse.lighting | www.norse.lighting

Please note: Specification values may change due to rapid development of lighting technology. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.

DOWN LIGHTS

BROOKE SERIES

PHOTOMETRIC DRAWINGS

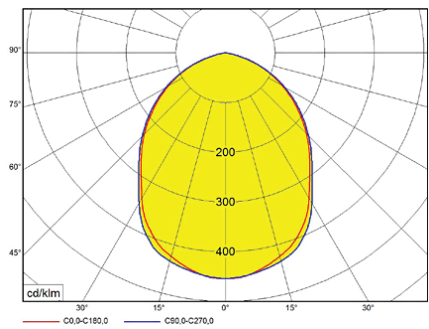

ADDITIONAL PHOTOS

OL-BROOKE-M1



OL-BROOKE-M2



OL-BROOKE-M3

