

# INDUSTRIAL LIGHT

# COLIN SERIES

## KEY FEATURES

### BODY

High quality glass reinforced pressed polyester body + galvanized metal sheet, INOX clips

### OPTIC


CO - polycarbonate opal cover

### LED

Mid power LED with constant current driver CRI 80 (CRI 90 on request)



## DIMENSIONS



MODEL NUMBER	A (mm)	B (mm)	C (mm)	X (mm)
OL-COLIN-M1 (W)	675	135	100	400
OL-COLIN-M2 (N)	1,275	84		800
OL-COLIN-M3 (W)	1,275	135		800
OL-COLIN-M4 (N)	1,575	84		1,100
OL-COLIN-M5 (W)	1,575	135		1,100

IP65
220-240V
50-60HZ
CRI 80
EEC A+
LIFETIME 80,000 HRS
↑
⚡
⚡
CE
RoHS
DALI
DIM 1-10V DC

Standard Warranty: 2 Years  
Extended Warranty: 3 Years

Accessories:  
Universal 4-wires suspension (/U4S)  
Protection grid (/PG)

## TECHNICAL SPECIFICATION

MODEL NUMBER	W	lm	lm/W	K
OL-COLIN-M1W-01	11	1,450lm	132	3,000K 4,000K 5,700K
OL-COLIN-M1W-02	20	2,750lm	138	
OL-COLIN-M2N-01	20	2,700lm	135	
OL-COLIN-M3W-01	40	5,500lm	138	
OL-COLIN-M4N-01	32	4,000lm	125	
OL-COLIN-M5W-01	50	7,500lm	150	
OL-COLIN-M5W-02	68	10,200lm	150	


Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.  
contact@norse.lighting | www.norse.lighting

Please note: Specification values may change due to rapid development of lighting technology. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.

# INDUSTRIAL LIGHT

# COLIN SERIES

## PHOTOMETRIC DRAWINGS

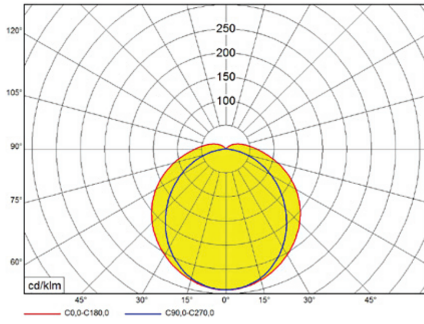

## ADDITIONAL PHOTOS

NARROW(N)



WIDE(W)



GROMMET



CLIP

