
NORSE®

LINEAR LIGHTS


JESSE SERIES DIRECT/INDIRECT SUSPENDED LINEAR LIGHT

KEY FEATURES

- Typical percentage output ratio 75:25
- Available in 3 standard lengths
- Delivering approx. 3000llm per meter as standard
- Coloured matched, injection moulded end caps
- TPa opal lens for feature, general and visual areas
- Low glare prismatic lens available for office and LG7 compliance
- Tridonic low energy LED and driver system
- Efficacy up to 130 llm/tcW
- Finished in RAL 9006 grey as standard

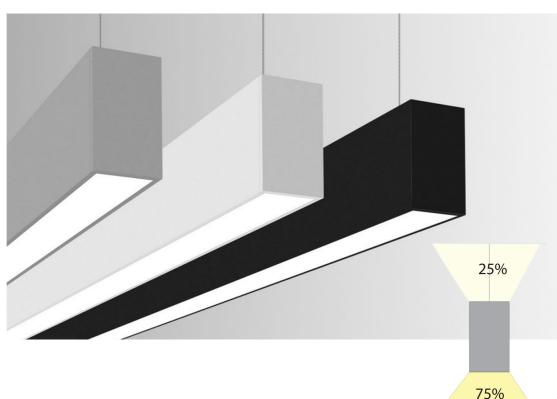

DIMENSIONS



























Standard Warranty: 2 Years Extended Warranty: 3 Years

TECHNICAL SPECIFICATION

MODEL NUMBER	STD / LO /HO	STD / LO /HO	K
NR-JESSE-M1	27W/19W/41W	2350lm/1600lm/3725lm	3,000K 4,000K
NR-JESSE-M2	38W/27W/59W	3525lm/2400lm/5600lm	
NR-JESSE-M3	47W/30W/76W	4550lm/3075lm/7225lm	

STD: STANDARD LO: LOW OUTPUT HO: HIGHOUTPUT

M1: 850MM | M2: 1.2M | M3: 1.5M


LINEAR LIGHTS


■ JESSE SERIES DIRECT/INDIRECT SUSPENDED LINEAR LIGHT

OPTIONS











ECO / SwitchDIM, Dali or DSI






_prismatic lens

LG / Low glare

ALSO AVAILABLE

BU.180 180deg butt joint bracket








Product variations Other colours and specifications available on request





_____Custom colours

Product variations



Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom. contact@norse.lighting | www.norse.lighting