

DOWN LIGHTS

KODY SERIES

KEY FEATURES

BODY

White painted (RAL9003)
metal sheet

OPTIC


Translucent acrylic layer
with microprismatic cover

LED

Mid power LED
CRI 80



DIMENSIONS

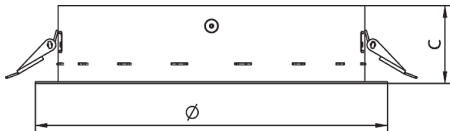

MODEL NUMBER	Ø(mm)	C(mm)
OL-KODY-M1	210	46
OL-KODY-M2	390	

IP20

220-240V

OPT TEMP
-20 to +40°C

50-60HZ

CRI 80

EEC A+

LIFETIME
80,000 HRS

CE

RoHS

Standard Warranty: 2 Years
Extended Warranty: 3 Years

TECHNICAL SPECIFICATION

MODEL NUMBER	W	lm	lm/W	K
OL-KODY-M1-01	12	1,200lm	100	3,000K 4,000K 5,700K
OL-KODY-M1-02	18	1,600lm	89	
OL-KODY-M2-01	28	3,000lm	93	
OL-KODY-M2-02	36	3,600lm	94	


Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.
contact@norse.lighting | www.norse.lighting

Please note: Specification values may change due to rapid development of lighting technology. Data may be rounded up/down for illustrative purposes.
Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.

DOWN LIGHTS


KODY SERIES

PHOTOMETRIC DRAWINGS

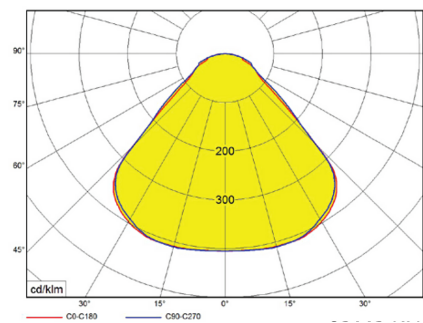

ADDITIONAL PHOTOS

COVER DETAIL

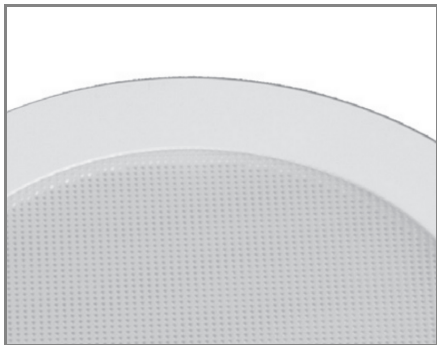

BODY



FIXING CLIP

