

PENDANT LIGHT


LUNA SERIES



KEY FEATURES

- Incorporating the Philips Fortimo DLM Flex and Xitanium driver
- Polycarbonate Lexalite Reflexor refractor
- Conical lens accessory option
- 2 m suspension kit as standard, 5 m option available
- Dimming options
- Colour combinations for gear housing available on request
- Life >60,000 hours (L70/B10)

DIMENSIONS

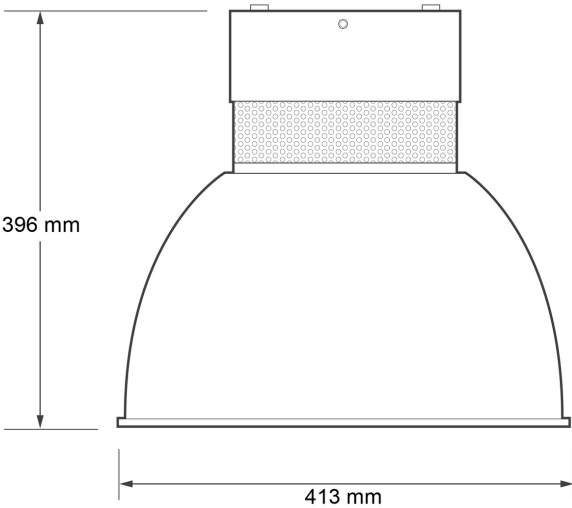

IP20

220-240V

50-60HZ

95% DLOR

PF >0.9

CRI >80

3yrs warranty

LIFETIME 60,000 HRS

CE RoHS

PHILIPS
TECHNOLOGY
INSIDE

TOUCH
DIMMING

DALI

Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.
contact@norse.lighting | www.norse.lighting

Please note: Specification values may change due to rapid development of lighting technology. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.

PENDANT LIGHT


LUNA SERIES PENDANT LIGHT

TECHNICAL SPECIFICATION

MODEL NUMBER	W	lm	K
OL-LUNA-01-3	11	1,025lm	3,000K 4,000K
OL-LUNA-01-4	11	1,100lm	
OL-LUNA-02-3	20	1,950lm	
OL-LUNA-02-4	20	2,125lm	
OL-LUNA-03-3	30	2,875lm	
OL-LUNA-03-4	30	3,125lm	
OL-LUNA-04-3	46	4,475lm	
OL-LUNA-04-4	46	4,875lm	

OPTIONS

T+DALI /
Touch dimming / DALI



5M / 5 m suspension kit



BB / Black, Black



GG / Grey, Grey



WB / White, Black



ACCESSORIES

4700 Conical lens
complete with clamp band

