

FLOOD LIGHT

NITRO SERIES

KEY FEATURES

BODY

Powder painted non-corrossive high pressure die-cast aluminium

OPTIC

Symetric glare-free optic lens

N - narrow beam 30°






W - wide beam 90°

APPLICATION

Floodlight for both indoor and outdoor application



DIMENSIONS

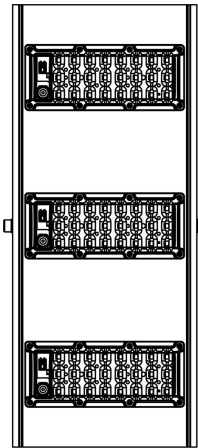

MODEL NUMBER	A (mm)	B (mm)	C (mm)
OL-NITRO-M1	95	200	138
OL-NITRO-M2	300		186
OL-NITRO-M3	480		206

IP65

220-240V

50-60HZ

CRI 80

CE

RoHS

Standard Warranty: 2 Years  
Extended Warranty: 3 Years

TECHNICAL SPECIFICATION

MODEL NUMBER	W	W	N	W	N	K
OL-NITRO-M1-01	74	9,800lm	9,600lm	133	130	3,000K 4,000K
OL-NITRO-M2-01	158	20,500lm	20,000lm	130	127	
OL-NITRO-M3-01	230	30,000lm	29,300lm	130	127	

Fabiia, G08, The Light Box, 111 Power Road, Chiswick, London W4 5PY, United Kingdom.  
contact@norse.lighting | www.norse.lighting


Please note: Specification values may change due to rapid development of lighting technology. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.

FLOOD LIGHT


NITRO SERIES

PHOTOMETRIC DRAWINGS

WIDE BEAM

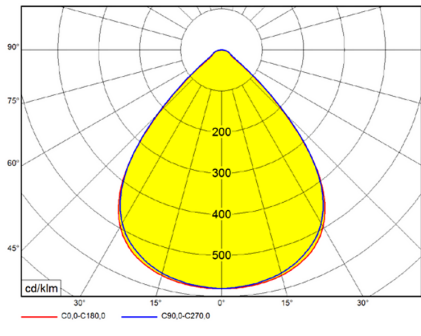

N BEAM

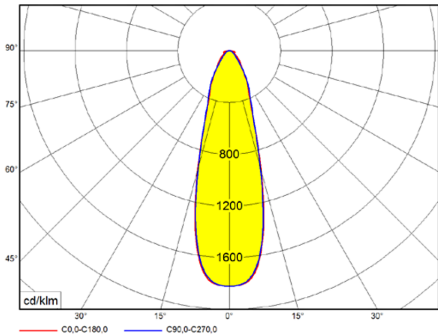

ADDITIONAL PHOTOS

NITRO M1



NITRO M2

